




PO Box. 454672, Dubai, UAE. Email: smarthomes@kedu.ae
Phone: (+971) 4 338 5000 Mobile: +971 55 798 1370



Classical V6 Start Smart Life

Professional Smart Home Application, supporting remote managing and controlling of smart devices, suitable for various life scenarios, and creating convenient and worryless smart life for you!

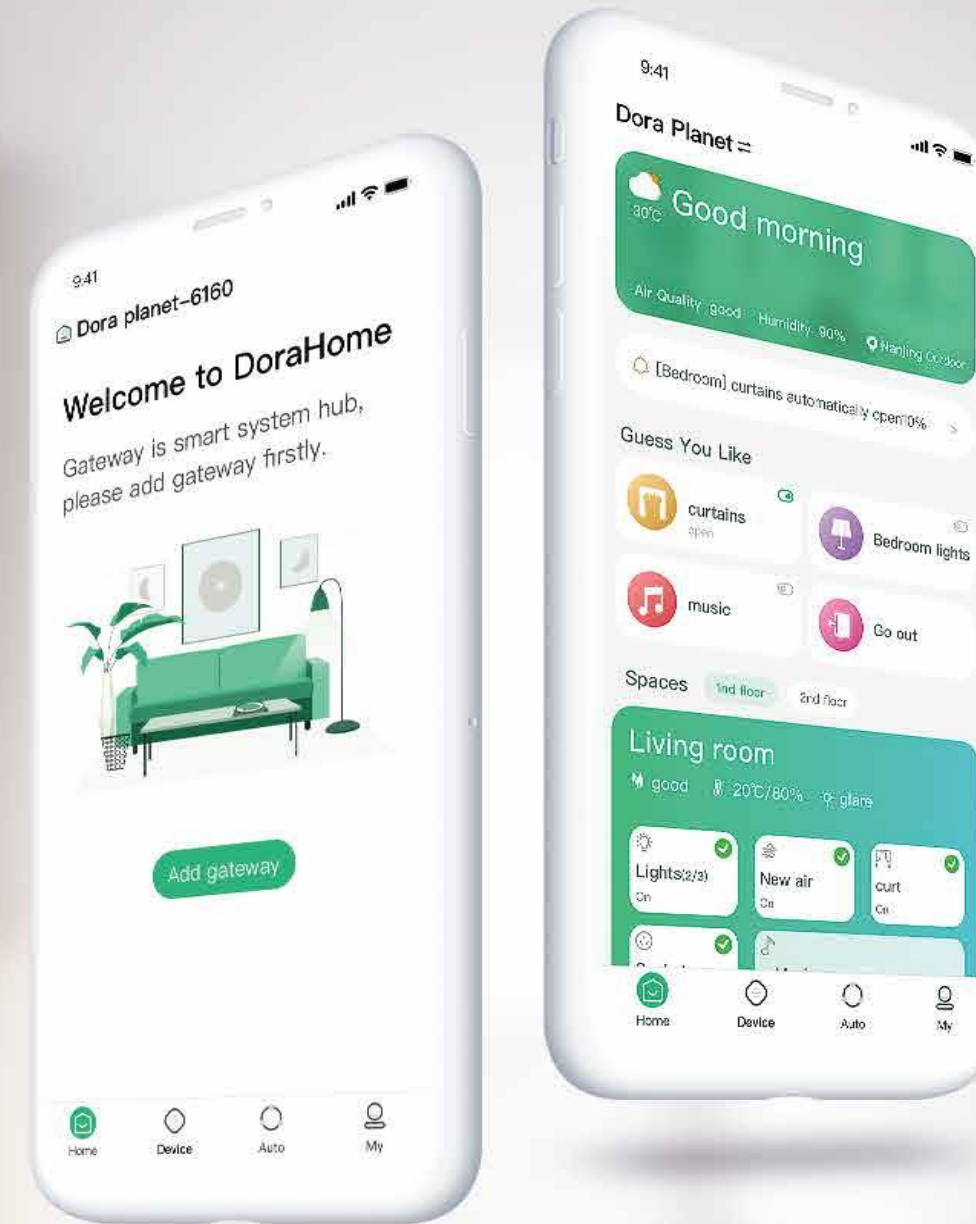

2020 Brand-new Interactive Design
More Considerate

Dora Home
Smart Home Joy Life

- **Simple Control**

Space divided into specific function zones, and stickers named with different devices, help user to control visually.

- **Real-time environment**

Integrating air quality sensor, temperature and humidity, etc., APP renders you know more.

- **Smart Scenario Recommendation**

On the basis of sensors and AI algorithm, discover user needs and recommend scenarios in order.



Catalogue

Interactive Center

HomePad	01-02
Video Intercom (10.1-inch)	03-04
Video Intercom (7.0-inch)	05-05
Villa Video Intercom (7.0-inch)	06-06

Smart Home Core

Smart Gateway (LAN)	07-07
Q-dim Gateway/ Vertical Gateway (LAN, AP)	08-08

Smart Doorlock

Smart Retina Doorlock	09-10
Smart Crown Doorlock	11-12
Smart Bern Doorlock	13-13
Smart Moonlight Doorlock	14-14
Smart Phoenix Doorlock	15-16

Smart Lighting

Salute Switch	17-20
Metallic Switch	21-22
SIFA Switch	23-24
VIVI Switch	25-26
Embedded Dimmer Switch	27-28
Scene Switch/Legrand Remote Controller	29-29
Embedded Switch/ Curtain Switch/ DIN Air Switch	30-30

Security System

AIoT Camera	31-32
Honeywell Smoke Detector/ Figaro Gas Detector	33-33
Smart Automation Manipulator/ Smart Water Leakage Sensor	34-34
Smart PIR Motion Sensor/ Smart Contact Sensor	35-35
Smart Panic Button/ Smart Sound Warner	36-36

Environment & Health

Smart Environment Detector	37-37
Smart temperature & Humidity Sensor	38-38

HVAC Control

Salute Thermostat	39-44
Smart VRV Controller	41-42

Household Appliance Control

Smart IR Transmitter/ Wi-Fi Universal Remote	43-44
Smart Wall Socket-Outlet/Salute Wall Socket-Outlet	45-46

Curtain Control

Curtain Switch	47-48
Curtain Motor/ Curtain Rail/ Roller Motor	49-50

Ecological Cooperation Products

Music Player Controller (BGM)	51-52
Accessories	53-53
Loona Magic Mirror/ Smart Drying Rack	54-54
Legrand Series	55-58

Voice Assistant

Tmall Genie/Xiaodu Speaker	59-60
Dingdong Speaker/Xiaobai Robot/Echo/Google Home	61-62

Project-version Products

Q-dim Gateway/ Panic Button	63-64
Contact Sensor/ PIR Motion Sensor	65-65
Temperature & Humidity Sensor/ Water Sensor	66-66
Gas Detector/ Smoke Detector	67-67
AC & Floor Heating Controller	68-68

Service Expansion

Smart Repeater/ Signal Translator (Serial Port)	69-70
---	-------

Solutions

Suite Configuration Case	71-74
Villa Configuration Case	75-76



Interaction Center

Customize own smart life via Homepad, video intercom.

HomePad



Smart control center, multiple screen choices

Full Touch Screen | Full-house Voice Control
Video Intercom | Four Screens



- 8.8-inch HD IPS retina display with 178°visual angle, adopting CNC process
- AI voice module, realizing instant wake —up
- Smart control center, for example, lighting control, curtain control, etc.
- Multiple screen choices for DIY
- Supports wired network and Wi-Fi access

Product Parameter

Display Screen: 8.8 inch, HD IPS retina display

Power supply: 220V, AC

Installation Method: Wall Mounting

Wired Access Mode: A 10 / 100M adaptive WAN port

Wireless Access Mode: 2.4GHz Wi-Fi



10.1-inch Indoor Unit



Product Parameter

Display Screen: 10.1-inch IPS touch screen
Power Supply: 24V, DC
Standby Electricity: $\leq 200\text{mA}$
Working Electricity: $\leq 350\text{mA}$
Working Temperature: $-10^{\circ}\text{C} - +55^{\circ}\text{C}$



10.1-inch Face Recognition Outdoor Unit

Multiple Unlocking Methods: Face recognition, QR Code, Passcode, App, Card.
10,000 Face Storage Capacity
Unlocking in 1 Second
Automatic light replenishment at night
Supports door condition feedback, and abnormal opening alarm
Supports cloud voice intercom, elevator linkage, etc.

Product Parameter

Display Screen: 10.1-inch TFT HD screen
Resolution Ratio: 800*1080
Camera: 200W color monocular wide dynamic camera
Operation System: Android 6.0.1
CPU: 64A, 4 core
Memory Capacity: 1GB DDR3
Storage Capacity: 8GB eMMC, up to 128G by TF card
Video Format: VGA 640*480 MJPEG
Voice Format: G.711A
Power Supply: Standard PoE 48V, or DC 24V
Power Consumption: $< 10\text{W}$
Dimension: 265*326*31mm




7.0-inch Video Intercom Indoor Unit



Product Parameter

Resolution Ratio: 1024*600
 Operation System: Android 6.0.1
 Power Supply: DC 24V
 Standby Electricity: ≤200mA
 Working Electricity: ≤350mA
 Working Temperature: -10°C- +55°C
 Dimensions: 220*140*17.5mm
 Installation Method: Wall Mounting

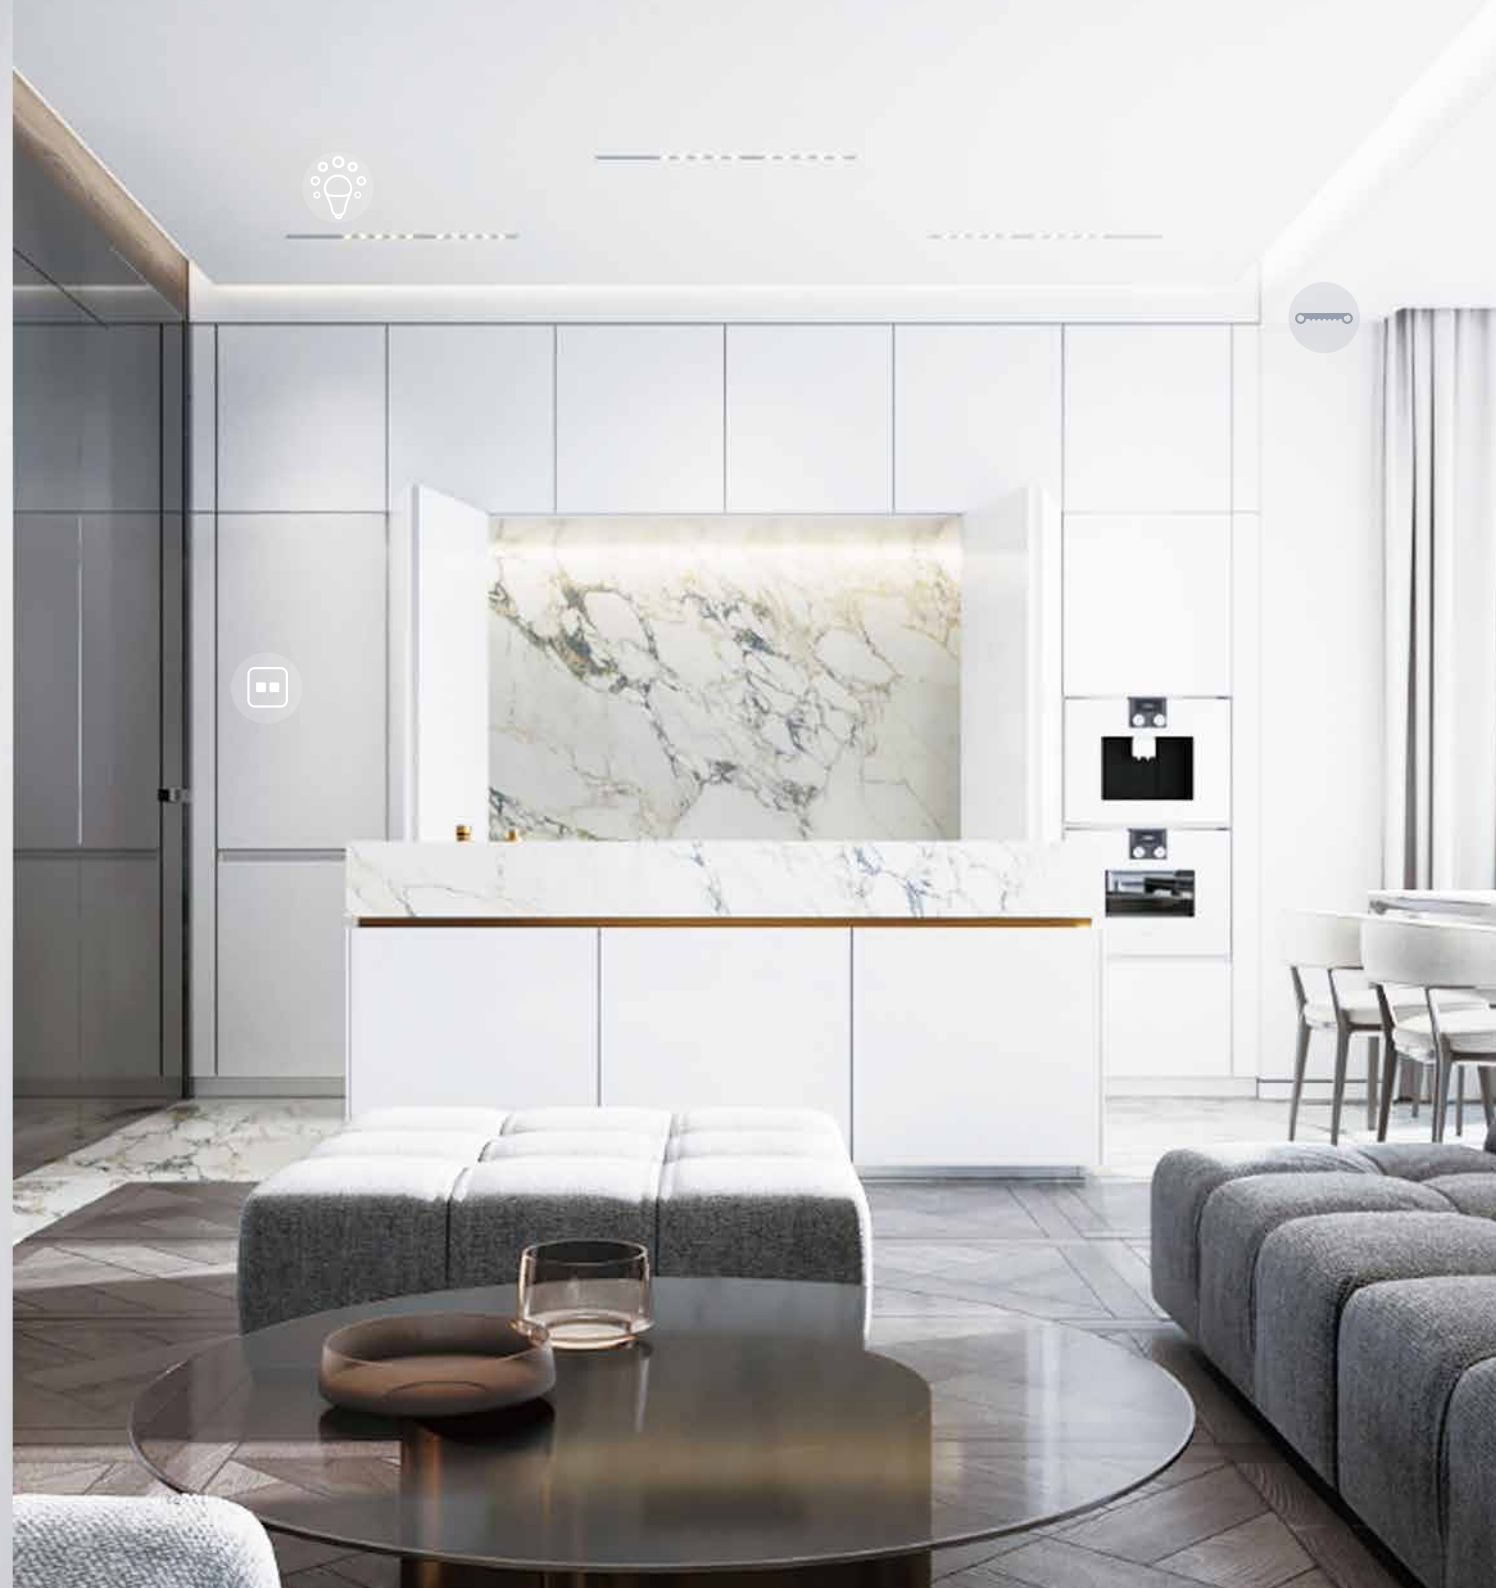

7-inch Face Recognition Outdoor Unit

Intercom System: Indoor Unit, Management Center, APP
 Unlocking Method: Call/Monitor, IC/ID Card, Passcode, Face Recognition, QR Code, etc.
 Video Monitoring: Management Center/APP Monitoring
 Message Records: Supports visitors leaving message
 Elevator Linkage: Supports calling integrated elevator

Product Parameter

Display Screen: 7-inch color LCD screen
 Resolution Ratio: 600 x1024
 Camera: CMOS, HD
 Operation Mode: Pressing
 Transmission Mode: TCP/IP Network
 Power Supply: 24V DC
 Standby Electricity: ≤ 150mA,
 Working Electricity: ≤ 300mA
 Working Temperature: -25°C- +70°C
 Installation Method: Wall Mounting
 Product Dimension: 148.5 * 363 * 47 mm
 Wall Box Dimension: 131.6 * 340 * 50 mm



Villa Outdoor Unit

Supports 24V PoE Power Supplying
 Supports IC card unlocking (up to 50 pieces)
 Door Condition Feedback, and abnormal opening alarm
 Supports upgrading online
 Supports up to 2 for each Villa

Product Parameter

Camera: CMOS (Pixel 30W)
 Visual Angle: Diagonal 95°
 Light compensation: Natural light
 Angle range: ±12°in circle
 Working Voltage: DC 24V
 Working electricity: ≤ 130mA
 Working Temperature: -25°C- +70°C
 Storage Temperature: -40°C- +70°C
 Product Dimension: 120 * 194 * 44.7 mm
 Wall Box Dimension: 100* 180 * 40 mm





Smart Home Core

Local smart control center. Easy to achieve efficient and reliable communication data transmission. Different with traditional complicated controlling process, creating a more comfortable and safer life.

Smart Gateway (LAN)

Smart Home Control Center

Connected to network cable, low power consumption, meeting a new generation of green design ideas.

Product Parameter

Power Supplying: DC 5V 1A, AC/DC Adapter

Power Consumption: ≤3W

Effective Range: 100m (Under visible conditions)

Wired Access Mode: A 10 / 100M Adaptive WAN Port

ROM Type and Capacity: SPI FLASH 16MB

Memory Type and Capacity: DDR2 32MB

Q-dim Gateway

The basis of smart device control

Network access, supporting LAN control

Zigbee dual modules built in, providing more device support options

RS485 interface supporting wired device control

Product Parameter

Power Supply: DC 5V 1A, AC/DC Adapter

Power Consumption: ≤3W

Communication Protocol: Zigbee3.0 and SmartRoom

Communication Range: 500m (visible conditions)

Wired Access Mode: 10 / 100M Adaptive WAN Port



Vertical Gateway

Network Cable Access

Connects Smart Home Network to LAN or Internet

Efficient and reliable transmission of communication data

Product Parameter

Power Supply: DC 5V 1A, AC/DC Adapter

Effective Range: 500m (Under visible conditions)

Wireless Access Mode: Wi-Fi

ROM Type and Capacity: SPI FLASH 16MB


Memory Type and Capacity: DDR2 64MB

Material Color : PC+ABS, Black



Smart Doorlock

Only owner can open. Provides real-time feedback of abnormal doorlock state. Locks safe against illegal intrusion.

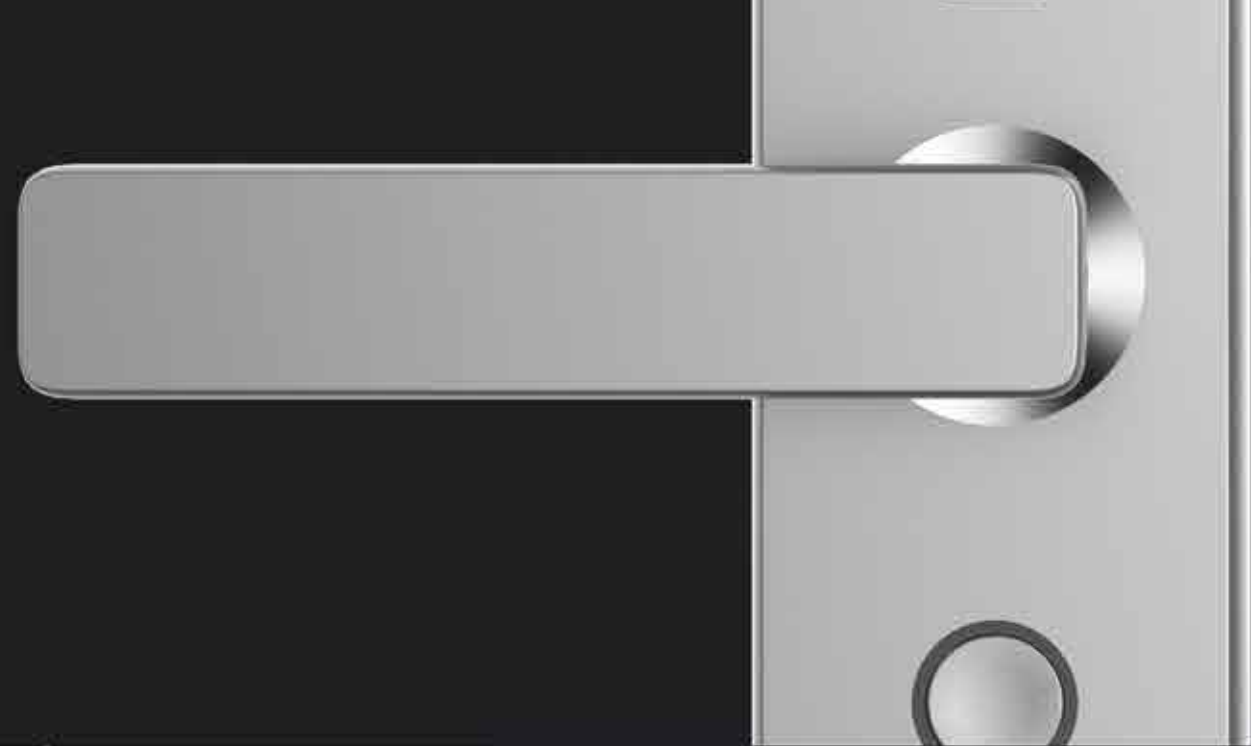



Smart Retina Doorlock

Fingerprint identification area on door handle, easy unlocking
Night vision camera, capturing the suspicious at anytime
6 unlocking methods / Smart Doorbell / 720P Camera
Smart Scenario / Door condition feedback/ multi-user management / Class C lock
Wechat control / SMS alarm notification / Video call

Product Parameter

Unlocking Methods: Fingerprint/Password/NFC/APP/Key
Fingerprint Recognition: Semi-conductor capacitive scanning
Camera: 720P
Camera Angle: 120° vertical, 90°horizontal
Capacity: 60 users(six fingerprints, one passcode and one NFC each user, excluding temporary user)
Emergency Power Supply: 9V laminated battery, and micro USB
Color: Silver / Red Copper / Bronze / Rose Gold

■ Silver ■ Red Copper ■ Bronze ■ Rose Gold





Smart Crown Doorlock (Plus)

Class A surface design, sleek and delicate
Block-chain encryption technology / More secure
Multiple unlocking methods / Multi-user management / Video call
Pry proof alarm / Smart doorbell / Suspicious capture(Plus)/ Push notifications

Product Parameter

Unlocking Methods: Fingerprint/Password/NFC/APP/Key
Fingerprint Recognition: Semi-conductor capacitive scanning
Capacity: 60 users(six fingerprints, one passcode and one NFC each user, excluding temporary user)
Color: Soft brown, Black

■ Soft brown ■ Black



Smart Bern Doorlock



Sleek and modern design

Supports remotely authorizing temporary password

Multiple unlocking methods/ Smart doorbell / Push notifications

Door condition feedback

Multi-user management / Class C lock / Wechat control


Product Parameter

Unlocking Methods: Fingerprint/Password/NFC/APP/Key

Fingerprint Recognition: Semi-conductor capacitive scanning

Capacity: 60 users(six fingerprints, one passcode and one NFC each user, excluding temporary user)

Color: Silver / Bright Red Copper / Bronze / Rose Gold / Champagne Gold / Pink Copper / Space Gray



Smart Moonlight Doorlock



Hidden fingerprint design

Advanced prevention function: cat eye unlocking, child unlocking and pet unlocking

One button to start leaving home mode, arming mode enabled

Information records: check unlocking records at any time.

Product Parameter


Unlocking Methods: Fingerprint/Password/NFC/APP/Key

Fingerprint Recognition: Semi-conductor capacitive scanning

Capacity: 45 users (three fingerprints, one passcode and one NFC each user, excluding temporary user)

Battery Life: 12 months (if less than 10 times a day)

Color: Silver / Bright Red Copper / Rose Gold / Champagne Gold / Bronze / Pink Copper / Black



Smart Phoenix Doorlock

Four mainstream unlocking methods, like fingerprint, passcode, card, App
Semi-conductor fingerprint recognition module with highly accurate identification, more user-friendly
Supports double authentication of fingerprint and passcode
Supports remote control, real-time feedback of doorlock status, and detecting suspicious stay in front of door
Shortcut, 'One key pressing', leaves home safe and secure

Product Parameter

User Capacity: 120 fingerprints, 42 passcodes and 37 cards

Color: Silver/ Black/ Gold

Fingerprint recognition error rate: <0.001%

■ Silver ■ Black ■ Gold



Smart Lighting

Light is never just illumination

Interlaced light can dance

Different light rendering a home different



Salute Switch

Remote Control on APP | Scene Control | L or L+N Self-adaptive Technology



Smart Salute Switch



Sleek surface design
Integrated Switch, Socket, Scene Switch and Thermostat
Unified style, allowed to combine freely
APP control and local control
Multiple modes available, such as Scenario, On/Off, and Binding

Product Parameter

Power: 100~240V AC, 50/60Hz
Communication mode: IEEE802.15.4(Zigbee)
Maximum load power: 300W
Working conditions: -10~45°C, ≤95% (No condensation)
Storage conditions: -20~70°C, ≤95% (No condensation)
Color: White/ Champagne Gold/ Carbon Black

White Champagne Gold Carbon Black



Salute Scene Switch

Wireless remote control of Smart Home products, for example, wall switches, etc.
 Can bind with local multiple devices, set linkage and create scenarios
 Can be installed on the wall
 Suitable for either installing or carrying

Product Parameter

Communication Protocol: IEEE 802.15.4 (ZigBee/SmartRoom)
 Power Supply: DC 3V (2 CR2032 batteries)
 Standby Current: <3μA
 Communication Distance: Within 100m
 Material Color: PC+ABS, White
 Installation Mode: Wall Mounting or Portable
 Color: White/ Champagne Gold/Carbon Black

White Champagne Gold Carbon Black



Salute Dimmer Switch

Can adjust brightness locally or remotely
 Touch control, fashionable and fast

Product Parameter

Communication Protocol: IEEE 802.15.4 (Zigbee/Smart Room)
 Power Supply: 220V AC (L+N)
 Standby Current: <3μA
 Dimming Type: Silicon Controlled
 Communication Distance: Within 100m
 Load Power: ≤300W
 Material Color: PC+ABS, White
 Installation Method: Wall Mounting
 Color: White/ Champagne Gold/Carbon Black

White Champagne Gold Carbon Black

Salute Series (Non-smart)

Salute Series provides both smart products and non-smart products, unified appearance design, making home style uniform.

White Champagne Gold



White Champagne Gold Carbon Black

Metallic Switch

Remote Control on APP
Scene Control
L or L+N Self-adaptive Technology



Smart Metallic Switch

Unique adaptive technology
No need to renovate home circuits
Supports timing /detecting signal intensity/setting linkage and scenarios
Supports both local and remote control, and working conditions feedback
Metal design, fashionable and concise



Product Parameter

Power Supply: 100~240V AC, 50/60Hz
Standby Power: $\leq 0.05W$
Minimum Load: 15W/Gang (recommended for L type)
Maximum Resistive Load: 240V~:2400W/10A
Maximum Inductive and Capacitive Load: 240V~:1560W/6.5A
Material: PC + Aluminum
Color: Silver/ Space Grey/Rose Gold/Champagne Gold

■ Silver ■ Space Grey ■ Rose Gold ■ Champagne Gold

SIFA Switch

Supports Binding | Remote Control | Scene Control



Smart SIFA Switch

No need to renovate home circuits

Supports both local and remote control, and working conditions feedback

Supports local control and remote control



Product Parameter

Power Supply: 100–240V AC, 50/60Hz

Standby Power: $\leq 0.07\text{W}$

Fire Rating: UL94–V0

Maximum Output Power: $< 800\text{W}$ (Resistive), $< 500\text{W}$ (Inductive), $< 00\text{W}$ (Capacitive)

Installation Method: Wall Mounting

Material: PC/ABS

Color: White/ Carbon Black/Champagne Gold/Grey

White Carbon Black Champagne Gold Grey

VIVI Switch

Capacitive Touch Screen/Flat Tempered Glass Panel



Smart VIVI Switch

Smart Athena Switch

Capacitive touch technology, millisecond response speed

Soft LED indicator light, with luminous navigation function

Magnetic suction type installation structure, convenient and fast

Supports lighting control, binding and scene control



Product Parameter

Material: PC/ABS/Tempered Glass

Fire Rating: UL94-V0

Power Consumption: $\leq 1W$

Working Conditions: $-10\sim 45^{\circ}C$, $\leq 95\%$

Storage Conditions: $-20\sim 70^{\circ}C$, $\leq 95\%$

Installation Method: Wall Mounting

Color: White/ Champagne Gold/ Grey

 White  Champagne Gold  Grey

Embedded Dimmer Switch



Embedded Dimmer Switch



Through adjusting voltage (0V—10V), output current gets changed, which in turn realizes dimmer function.
When the voltage reaches the maximum of 10V, output current is the highest and the light intensity is the strongest while the voltage reaches the minimum of 0V, no current passing, the light is off.
Small size, and high compatibility.

Product Parameter

Communication Protocol: IEEE 802.15.4 (Zigbee / SmartRoom)
Antenna Type: FPC
Power Supply: AC 100–240V, 50/60Hz
Output: DC 0–10V, supporting two–gang output
Dimension (L*W*H): 42*42*17mm
Working Condition: –10~45°C, ≤95%RH (No condensation)

Scene Switch

Supports to remotely control wall switches
Can bind with local multiple devices, and set linkage
Allowed to customize couple of scenarios
Battery power supply

Product Parameter

Power Supply: 2 CR2450 (Battery)
Material Color: PC + ABS, Pearl White
Fire Rating: UL94 V-2
Installation Method: Wall Mounting, or Portable



Legrand Remote Controller

Can bind with local multiple devices, and set linkage
Allowed to customize couple of scenarios
Magnetic suction installation, safe to save
Supports naming scenario, easy to distinguish

Product Parameter

Communication Protocol: Zigbee IEEE802.15.4
Frequency Range: 2405-2480Mhz
Wireless Rate: Maximum250kbps
Transmission Distance: 100m, if open space
Standby Current: $\leq 2\mu A$



Embedded Switch/Curtain Switch

Makes traditional switch smartly upgraded via embedding
Supports smart controlling of lights on/off
Supports both local and remote control, and working conditions feedback
Supports timing /setting linkage and scenarios

Product Parameter

Antenna Type: FPC
Maximum Resistive Power: 3600W
Maximum Inductive & Capacitive Power: 600W (One-Gang), 1200W (Two-Gang)
Curtain Motor Power: 240V~300W or 100V~125W



DIN Air Switch

Supports high load (32A)
Can monitor current power and electricity usage in real time
Energy-saving
No standby power consumption

Product Parameter

Power Supply: 100-240V AC, 50/60Hz
Standby Power: $\leq 0.5W$
Rated Maximum Current: 32A
Material Color: PC, White
Flame Rating: UL94 V-0



Security System

Smart security devices like Indoor Camera, Outdoor Camera, Contact Sensor, Water Leakage Sensor, etc. form comprehensive security system, making you feel safe and secure no matter how far you are from home.



AloT Camera

AloT Camera

AI Human shape detection, more accurate alarm
Large format 1 / 2.7 inch CMOS image Sensor
A high power motor built in
Panoramic PTZ view for real-time monitoring
Supports two-way voice call
Supports pushing alarm notifications to APP in real time

Product Parameter

Transmission Distance: Within 50m
Power Supply: DC 5V
Power Consumption: 1.6W
Product Size: 77.4*77.4*106.1mm
Installation Method: Wall Mounting, Ceiling Mounting, Placing
Maximum Resolution: 1980*1080
Working Temperature and Humidity: -10°~+45°, ≤ 95%



Honeywell Smoke Detector

Used in detecting smoke
Can work independently or constitute the security system
Low battery indicator
Sound and light alarm signal

Product Parameter

Power Supply: DC 9V
Alarm Decibel: > 80dB
Alarm Method: Sound–light alarm
Installation Method: Wall Mounting



Figaro Gas Detector

Used to detect gas leakage
Sends emergency alarm in time
Can link with relevant devices to solve emergencies
Strong anti–interference ability, can automatically adjust the sensitivity

Product Parameter

Alarm Decibel: > 70dB
Alarm Concentration: < 25%LEL
Measurable Type: Natural Gas, Liquefied Gas, Artificial Coal Gas
Detecting Method: Figaro Semiconductor gas detector
Installation Method: Wall Mounting



Smart Automatic Manipulator

No needs supervision or operation, highly smart
Can be calibrated manually
Precision structure with high air tightness and safety
Brand–new design, more home friendly

Product Parameter

Power Supply: 4 AA batteries, DC 5V 1A or AC/DC adapter
Torque: 35kg*cm
Installation Site: On gas valve



Smart Water Leakage Sensor

Water contact probe with high sensitivity
Monitors the leakage situation at all times
Alarm notifications sent out smartly in time
Can link with relevant devices to solve emergencies

Product Parameter

Power Supply: DC 3V (CR2*1)
Detectable Water Level: ≥ 1mm
Material Color: PC, White
Flame Retardant Rating: UL94 V–2



Smart PIR Motion Detector

WL-ZSPWBPW-PI11-02

Pushes alarm notifications when detecting any movements
Can link with relevant devices to set up advanced defense
Adjustable detection range

Product Parameter

Power Supply: Battery (CR2*1)
Detection Range: An ellipse of 4m long axis and 3.5m short axis
Installation Height: 2.3-4m (recommended)
Installation Method: Base fixed



Smart Contact Sensor

Monitors the real-time status of doors or windows
Pushes alarm notifications in time when detecting illegal open
Low power consumption, energy-saving and environment friendly
Embedded design, compact size, easy to hide

Product Parameter

Power Supply: Battery (CR2*1)
Detection Accuracy: 20mm
Installation Method: Screw fixation or 3M adhesive fixation



Smart Panic Button

WL-ZSPPBPW-IB-03

Used for emergency alarm
Compact design, portable
Low power consumption, energy-saving and environment friendly
Supports local and remote alarm

Product Parameter

Power Supply: DC 3V (CR2450*1)
Standby Current: $\leq 0.5\mu\text{A}$
Material Color: PC + ABS, White
Flame Retardant Rating: UL94 V-2
Installation Method: Wall Mounting or Carry-on



Smart Sound Warner

Can link with relevant devices to set up advanced defense
Wireless transmission alarm with quick response
High anti-interference ability, and high alarming accuracy
Supports for local or remote arming and disarming

Product Parameter

Power Supply: 100-240V AC, 50/60Hz
Alarm Decibel: $\geq 85\text{dB}$ (within 1m)
Installation Method: Ceiling Mounting



Environment & Health

After a long, busy working day, you must want to go back home to relax, where the environmental conditions like the temperature, humidity, light intensity or even CO2 concentration, etc. are good enough, just like the Arcadia. If you want, We can help you realize it.



Smart Environment Detector



Supports monitoring temperature & humidity
PM2.5, PM1.0, PM10, etc.
Keeps monitoring 24/7, and provide feedback
of real-time data to APP

Product Parameter

Measurable Temperature Range: (-10°C~0°C/±1°C)
(0°C ~+60°C/ ±0.5°C)
(60°C~70°C/±1°C)

Measurable Humidity Range: 5%~95%RH/ ±4.5°C

Installation Method: Horizontal Placing



Smart Environment Detector

Supports monitoring temperature & humidity, PM2.5, PM1.0, PM10, etc.
Keeps monitoring 24/7, and provide feedback of real-time data to APP

Product Parameter

Power Supply: 220V AC

Measurable Temperature Range: (-10°C~0°C/±1°C)
(0°C ~+60°C/ ±0.5°C)
(60°C~70°C/±1°C)

Measurable Humidity Range: 5%~95%RH/ ±4.5°C

Installation Method: Wall Mounting



Smart Temperature & Humidity Sensor

Monitors the real-time temperature and humidity
Can link with relevant devices to improve environment quality in time
Low power consumption, energy-saving and environment friendly

Product Parameter

Power Supply: DC 3V

Bandwidth: 2.405~2.480GHz

Communication Range: 100m

Flame Retardant Rating: UL94 V-2

Installation Method: Base Fixed

Measuring Humidity Accuracy: 5%~95%RH/±4.5

Measuring Temperature Accuracy: (-10°C~0°C /±1°C) (0°C~+60°C /±0.5°C) (60°C~70°C /±1°C)





HVAC Control

The HVAC control system formed by the fresh air controller, air conditioning controller and other smart devices, can realize the remote control or linkage control of AC, floor heating, etc., which meets your perfect vision for home, making you enjoy.

Salute Thermostat (Ventilation)



Supports the control of solenoid valve type fresh air
Supports Zigbee networking and APP remote control
Used on switching on/off
Three options of wind speeds

Product Parameter

Power Supply: 220V AC
Standby Current: <3V
Rated Output Current: 2A (Resistive)/ 1A (Capacitive)
Product Dimensions: 86*86*38mm
Installation Method: Wall Mounting

White Champagne Gold

Salute Thermostat (Fan Coil)

Supports Fan-coil central air conditioning control
Supports Zigbee networking and APP remote control

Product Parameter

Power Supply: 220V AC
Standby Current: <3V
Rated Output Current: 2A
Adjustable Temperature Range: 10~32°C
Measuring Temperature Range: 0~45°C
Product Dimensions: 86*86*38mm
Color: White/ Champagne Gold



White Champagne Gold

Salute Thermostat (AC)

Supports VRV central air conditioning control
Supports Zigbee networking and APP remote control
Used with smart VRV controller for single indoor unit

Product Parameter

Power Supply: 220V AC
Standby Current: <3V
Adjustable Temperature Range: 10~32°C
Measuring Temperature Range: 0~45°C
Product Dimensions: 86*86*38mm
Color: White/ Champagne Gold



White Champagne Gold



Smart VRV Controller (single unit)

Used with AC thermostat
Supports single indoor unit of central air conditioning
Supports Dakin, Hitachi, Midea, etc.

Product Parameter

Power Supply: No required
Communication Protocol: RS485
Installation Site: Placed in the indoor air conditioner access



Smart VRV Controller (multi-units)

Supports the smart control of AC, Fresh Air, Floor Heating of many brands
For example,
AC: Dakin, Hitachi, Mutsubishi, Toshiba, Panasonic, Midea, etc.
Fresh Air: Honeywell, Bailand, Lancher, etc.
Floor Heating: Bosch, Honeywell, Helin, etc.

Product Parameter

Power Supply: 12V Adapter
Communication Protocol: Zigbee
Maximum Capacity Supported: 64 units
Installation Site: Placed in the indoor air conditioner access



Household Appliance Control

IR transmitter, smart socket and other smart controlling devices help realize 'bring your home with you' via just a mobile phone. They make your home easy and convenient.

Smart IR Transmitter (Top Emitted)

Can link with multiple infrared devices to realize smart control
Compact and delicate design, and easy to use
Supports remote control/timing/linkage control/scenarios setting

Product Parameter

Power Supply: DC 3V (CR2*1)
Controllable Range: 5m
Controlling Angle: 45°
Communication Protocol: Zigbee
Flame Retardant Rating: UL94 V-2
Installation Method: Base Fixed or Portable



Wi-Fi Universal Remote

Contains massive code library
Can link with multiple infrared devices to realize smart control
Compact and delicate design, and easy to use
Supports remote control/timing/linkage control/scenarios setting

Product Parameter

Power Supply: DC 5V, AC/DC Adapter
Infrared Frequency: 38KHz
Communication Protocol: IEEE802.11b/g/n 2.4G
Standby Current: 0.5W
Product Dimensions: 70mm in diameter, 17mm in height



Smart Wall Socket–Outlet

Smart control of household appliances on and off
Supports remote check and control
Supports timing/ linkage control / scenario setting




UK Type 10A



UK Type 15A



UK Type 20A

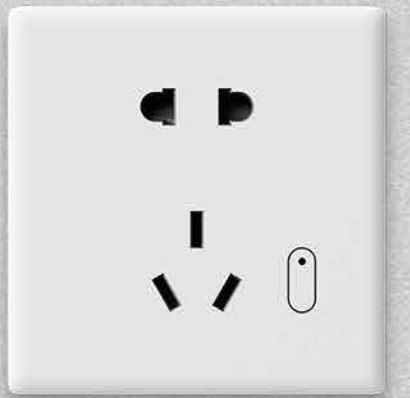

Salute Wall Socket–Outlet

ZY-ZSKFNPW-W3110-0

Smart control of household appliances on and off
Supports remote check and control
Supports timing/ linkage control / scenario setting

Curtain Control

Linked with curtain motor, according to environmental conditions, it can easily realize smart sun-shading, bringing you a great sense of comfort and making you feel the warmth of the family.

Salute Smart Curtain Switch

Smart control of curtains on and off
Supports local or remote check and control
Supports timing/ linkage control / scenario setting

Product Parameter

Motor Power: $\leq 125W$, 50/60Hz
Standby Power Consumption: $\leq 0.5W$
Load Type: Single Phase AC Curtain Motor
Color: White/ Champagne Gold/ Carbon Black



White Champagne Gold Carbon Black

Smart Metallic Curtain Switch

Smart control of curtains on and off
Supports local or remote check and control
Supports timing/ linkage control / scenario setting
High impact resistant material for shell, strong and durable

Product Parameter

Motor Power: $\leq 125W$, 50/60Hz
Standby Power Consumption: $\leq 0.5W$
Load Type: Single Phase AC Curtain Motor
Product Dimensions: 86*86*35mm
Material Color: PC+ Aluminum, Silver, Space Grey, Rose Gold, Champagne Gold



Silver Space Grey Rose Gold Champagne Gold

Smart Curtain Motor (DC)

Smart control of curtains on, off and pause
Supports remote control
Supports timing/ linkage control / scenario setting

Product Parameter

Power Supply: DC 12V Adapter
Input Power: 75W
Weight-carrying Capacity: 100kg
Motor Speed: 112r/min
Installation Method: Fixed on Curtain Rail



Curtain Rail

Stable structure, and easy operation

Product Parameter

Installation Method: Ceiling Mounting, Side Wall Mounting



Electrical Roller Motor

Best choice for electrical roller shutter
Roller motor hidden in the roller track, safe and beautiful
Super noise-free

Product Parameter

Power Supply: AC 100~240V 50/60Hz
Weight-carrying Capacity: 5kg
Maximum Input Power: 45W
Rated Torque: 3N.m



Smart Curtain Motor (DC)

Linkage with monitoring system, according to light intensity,
automatically adjust curtain on/off
Super noise-free
No wear and tear, longer service life
APP control, remote control

Product Parameter

Power Supply: 220V±10%, AC, 50/60Hz
Input Power: 75W
Weight-carrying Capacity: 100kg
Motor Speed: 112r/min
Installation Method: Fixed on Curtain Rail



Ecological Cooperation Products

With multiple brands of products access, breaking through category options
More modern technology in the home, our life more warm

U6

Product Parameter

Display Screen: 7-inch 1024*600 HD LCD

Box Dimension: 180*110*60mm

Network: Ethernet and Wi-Fi

White Black Gold



BM209

Product Parameter

Display Screen: 10.1-inch 1920*1080 HD LCD

Box Dimension: 162*106*62mm

Network: Ethernet and Wi-Fi

Voice Control: Supported

White Black Gold

AI Speaker P3B

Product Parameter

Display Screen: 7-inch 1024*600 HD IPS LCD

Installation Dimension: 175*106*62mm

Microphone: Not supported voice control

Color: Silver/ Gold

Ports: RJ45, RS485, I/O, Audio-out, Aux-in



Accessories

Wise 4-inch Loud Speaker

Product Parameter

Color: White

Power: 25W

Frequency Range: 50~2200Hz

Installation Dimension: Diameter 160mm

Product Size: **186*68**



Wise 5-inch Loud Speaker

Product Parameter

Color: White

Power: 25W

Frequency Range: 50~2200Hz

Installation Dimension: Diameter 180mm

Product Size: 204*90mm



Wise Controller Box

Product Parameter

Material: Flame Resistant ABS

Product Size: 180*110*60mm

Supports BM206/U6/U10/H series



Loona Magic Mirror

Wulian Smart Home operation system included

Provides data of temperature and humidity, light intensity, air quality, etc., and links with other smart devices to improve home environment

Supports measuring and recording of weight and skin state

Provides social, shopping, video, information inquiry and other functions



Smart Drying Rack

Includes electric remote control, integrated lighting and ultraviolet disinfection, etc.

Supports automatic air drying, smart drying, etc.



Legrand Series

Various material options



Wall Gateway

The basis of smart device control
Supports wired and wireless access
Connects home automation network to Internet

Product Parameter

Power Supply: 220V AC, 50Hz
Maximum Power: 3.5W
Communication Protocol: IEEE802.15.4 (Zigbee/Smart Room)
Installation Method: Wall Mounting
Working Temperature: -10°C~45°C
Working Humidity: ≤95% (No condensation)



Smart Switch

Frameless design, double-layer high-quality PC panel
Ultra-low power consumption, even and soft light
Indicator light allowed to turn on/off
Concise and elegant appearance, and laser carving logo
Various colors and materials available

Product Parameter

Communication Protocol: IEEE802.15.4
Transmission Distance: Within 100m
Installation Mode: Wall Mounting
Material: PC/ABS



Curtain Switch

Smart control of curtains on and off
Supports timing/ linkage control / scenario setting
Better touch feeling

Product Parameter

Communication Protocol: Zigbee IEEE802.15.4
Transmission Distance: Within 100m
Standby Power Consumption: $\leq 1W$
Installation Mode: Wall Mounting
Working Temperature: $-10^{\circ}C \sim 45^{\circ}C$
Working Humidity: $\leq 95\%$ (No condensation)



Scene Switch

Battery power supply, no home wiring required
White series, suitable for most of home style
Two choices each, easy to control

Product Parameter

Communication Protocol: Zigbee IEEE802.15.4
Transmission Distance: Within 100m
Material: PC/ABS



Smart Socket

Smart control of electricity on and off
Supports timing/ linkage control / scenario setting
High-gloss texture, pure and flawless surface

Product Parameter

Communication Protocol: Zigbee IEEE802.15.4
Transmission Distance: Within 100m
Standby Power Consumption: $\leq 0.5W$
Installation Mode: Wall Mounting
Working Temperature: $-10^{\circ}C \sim 45^{\circ}C$
Working Humidity: $\leq 95\%$ (No condensation)



Dimmer Switch

Supports bidirectional dimming
Smart adjustment of light intensity, suitable for light sensitivity people to use
Equipped with wireless LED, can be a guide at night

Product Parameter

Communication Protocol: Zigbee IEEE802.15.4
Transmission Distance: Within 100m
Installation Mode: Wall Mounting
Material: PC/ABS



Voice Assistant

Supports Google Home, Echo, Alexa and other mainstream voice control assistants, realizing convenient control of various scenarios.

Tmall Genie

Songs, news, etc. massive online audio and video resources
Used to voice control lighting, TV, curtains, AC, etc.
Supports to voice broadcast weather, time, utility bills, etc.
Life assistant, instead of schedule reminder, alarm clock, etc.



Xiaodu Speaker

Massive online audio and video resources
Touch screen supporting to control smart home devices
Used to voice control lighting, TV, curtains, AC, etc.
Supports video calling



Dingdong Speaker

AI Home Assistant, voice smart control of home devices
Personality recommendations, like music, opera, economics, children stories, etc.
Life assistant for weather checking, night light, translator, etc.
Nearly 2000 practical skills available, such as encyclopedia, special car, fitness, etc.



Xiaobai Robot

Emotion master
Smart life assistant
Supports voice control of smart home devices
Provides convenient life service searching



Echo

Supports playing 3D-sound music
Used to voice control lighting, TV, curtains, AC, etc.
Supports to search information of weather, traffic, sports , news, etc.



Google Home

Smart home center
Supports setting alarm clock, voice interaction
Supports voice control lighting, TV, curtains, AC, etc.
Can play music



Products (Project-version)

Highly cost-efficient

Supports customization

Creates a good service support for partners in construction projects



Q-dim Gateway

The basis of smart device control

Network access, supporting LAN control

Zigbee dual modules built in, providing more device support options

RS485 interface supporting wired device control

Product Parameter

Power Supply: DC 5V 1A, AC/DC Adapter

Power Consumption: ≤3W

Communication Protocol: Zigbee3.0 and SmartRoom

Communication Range: 500m (visible conditions)

Wired Access Mode: 10 / 100M Adaptive WAN Port



Panic Button

One key pressing to send emergency call

Adopting low-power micro processor module

Ultra-long standby time

Low battery notification, regularly sent to the host

Product Parameter

Communication Protocol: Zigbee

Power Supply: DC 3V (Battery CR2032*1)

Material: PC + ABS

Product Size: 50*50*16mm

Fixation Method: 3M Adhesive



Contact Sensor

Adopts Hall technology

Can sense the open / close status of doors, windows electrical appliances, furniture cabinets, drawers, etc.

Product Parameter

Communication Protocol: Zigbee

Detectable Range: > 25cm

Product Size: Main Unit: 26.5*52.5*13.5mm

Vice Unit: 12.5*25.5*13.5mm

Fixation Method: 3M Adhesive



PIR Motion Sensor

Adopts rotatable full-angle design,

and pyro-electric infrared sensing technology

Sensitive recognition of heat changes, smartly detecting any human movement

Product Parameter

Communication Protocol: Zigbee

Detectable Range: Within 8m

Detection Angle: > 90 degrees

Product Size: 48*53.2mm

Fixation Method: 3M Adhesive, Magnetic Catch



Temperature & Humidity Sensor

Real-time sensation of temperature and humidity changes and feedback to users on APP

Product Parameter

Communication Protocol: Zigbee

Temperature Accuracy: $\pm 0.3^{\circ}\text{C}$

Humidity Accuracy: +3%RH

Fixation Method: 3M Adhesive



Water Sensor

Real-time detection of water leakage

When detecting the water leakage, sending alarm to host in time

Product Parameter

Communication Protocol: Zigbee

Waterproof Rating: IP66

Product Size: 50*18mm

Installation Method: Horizontal Placement



Gas Detector

Real-time monitoring of natural gas leakage
When the leakage reaches the alarm threshold,
local alarm triggered and pushing notifications on APP

Product Parameter

Communication Protocol: Zigbee
Alarm Threshold: 8% LEL + 3% LEL
Error Range: 3% LEL
Alarm Decibel: >70 dB



Smoke Detector

Detecting smoke all the time
Supports local alarm and pushing notifications on APP to remind

Product Parameter

Communication Protocol: Zigbee
Detection Type: Photoelectric smoke sensing (independent)
Alarm Decibel: >85dB
Fixation Method: Ceiling Mounting



AC & Floor Heating Controller

Supports Fan-coil AC
VRV Central AC and Floor Heating control
Supports Zigbee networking and remote control on APP

Product Parameter

Power Supply: 220V AC
Adjustable Temperature Range: 10°C~32°C
Measurable Temperature Range: 0°C~45°C
Product Size: 86*86*38mm
Color: White/ Champagne Gold
Installation Method: Wall Mounting



White Champagne Gold

Service Expansion

To realize wireless smart control for traditional wired devices, expand signal transmission range and make signal more stable, to further ensure smart life.

Smart Repeater

Extends the coverage of Zigbee network
Plug-in power supply, save space
Compact size, elegant appearance

Product Parameter

Power Supply: 100–240V AC, 50/60Hz
Standby Power Consumption: ≤0.5W
Wireless Communication Range: Within 500m
Installation Method: Plug in



Signal Translator (Serial Port)

Commonly used in Central Air Conditioning, Fresh Air
Floor Heating and other equipment's protocol docking
Gets the traditional serial protocol like RS-232 and RS-485 transferred to smart wireless protocol
Realizing the bidirectional reliable transmission of data, low power consumption
small volume and easy use.

Product Parameter


Power Supply: DC 12V
Serial Port Type: RS-232, RS-485
Flame Retardant Rating: UL94 V-2
Installation Method: Wall Mounting









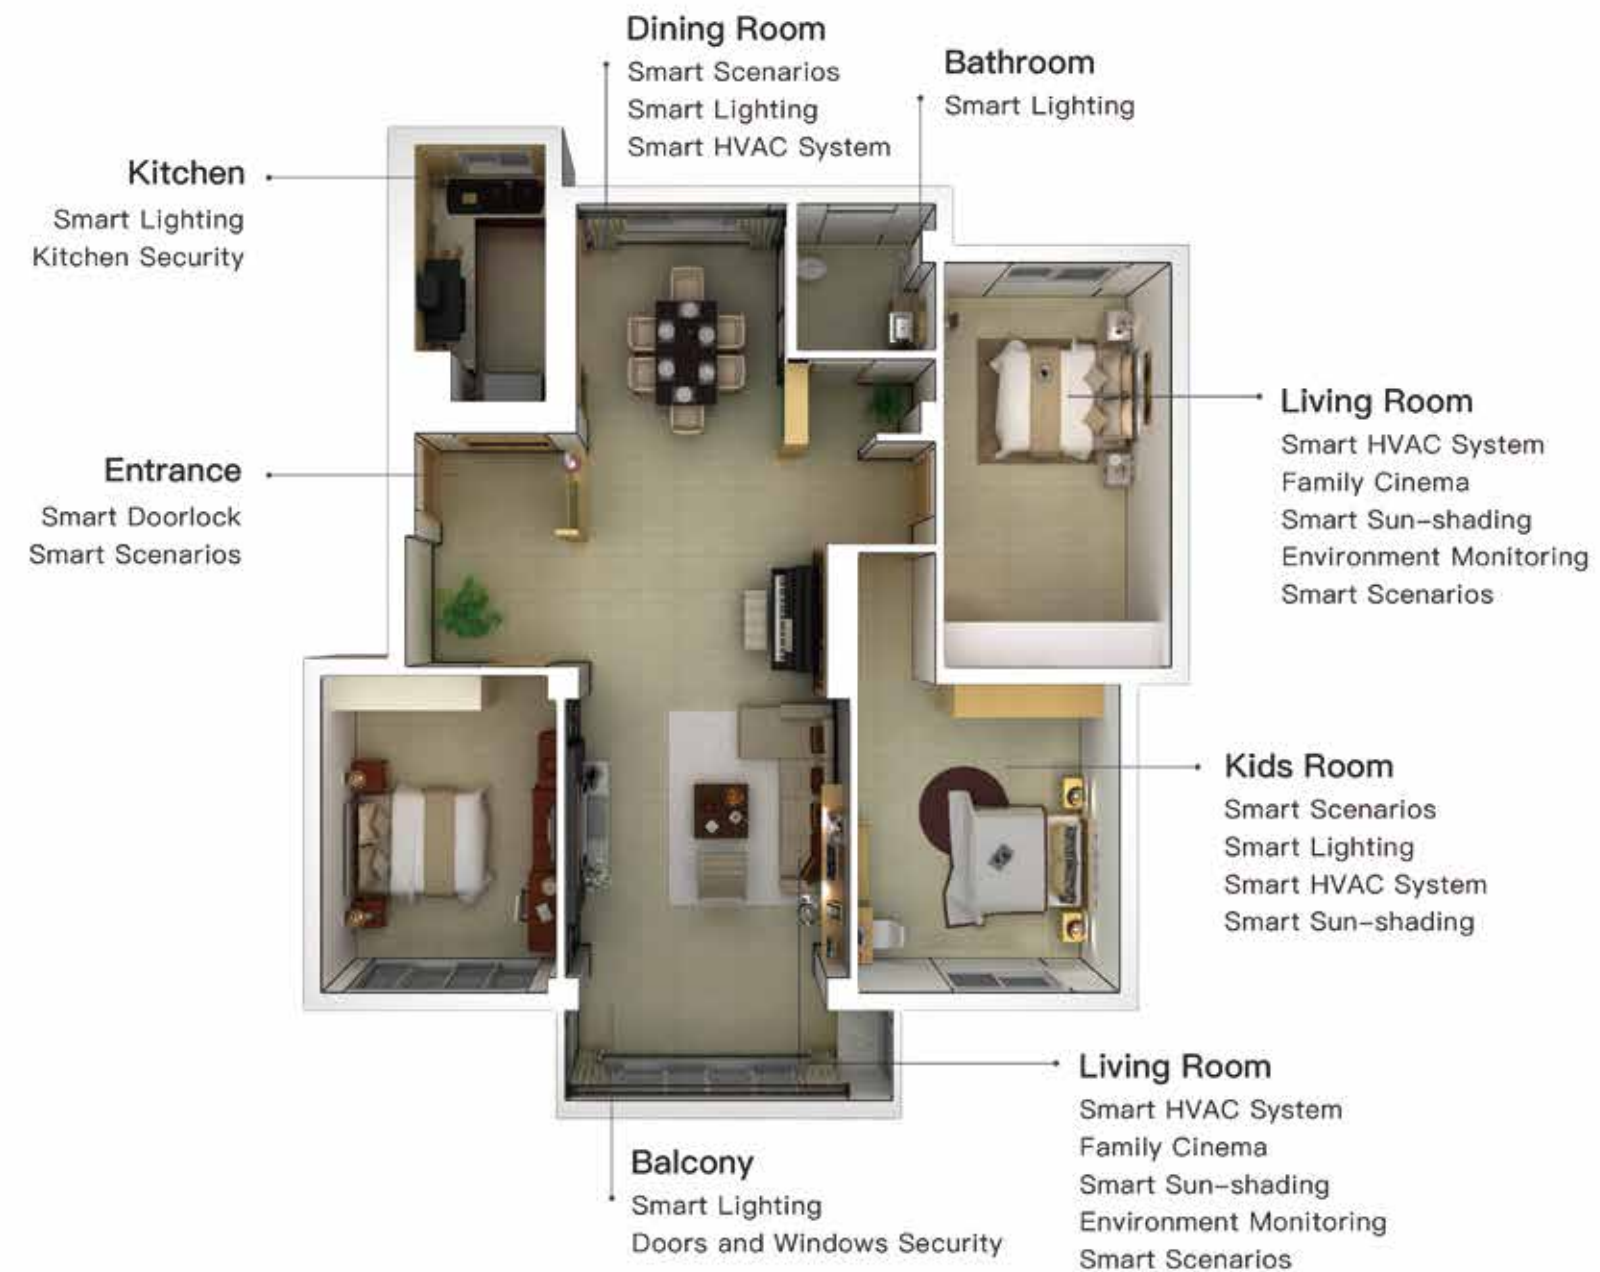







Solutions


Wulian always adheres to the user-friendly interaction principle, high-quality product experience and convenient smart home management system to create prime smart living environment for customers.

Configuration Case



Configuration Case

Devices	
	Smart Doorlock
	Smart Gateway
	One-gang Switch
	Two-gang Switch
	Three-gang Switch
	Curtain Motor
	Curtain Track
	Wall Socket
	Scene Switch
	Gas Detector
	Smoke Detector
	Water Leakage Detector
	Panic Button
	Environmental Monitoring

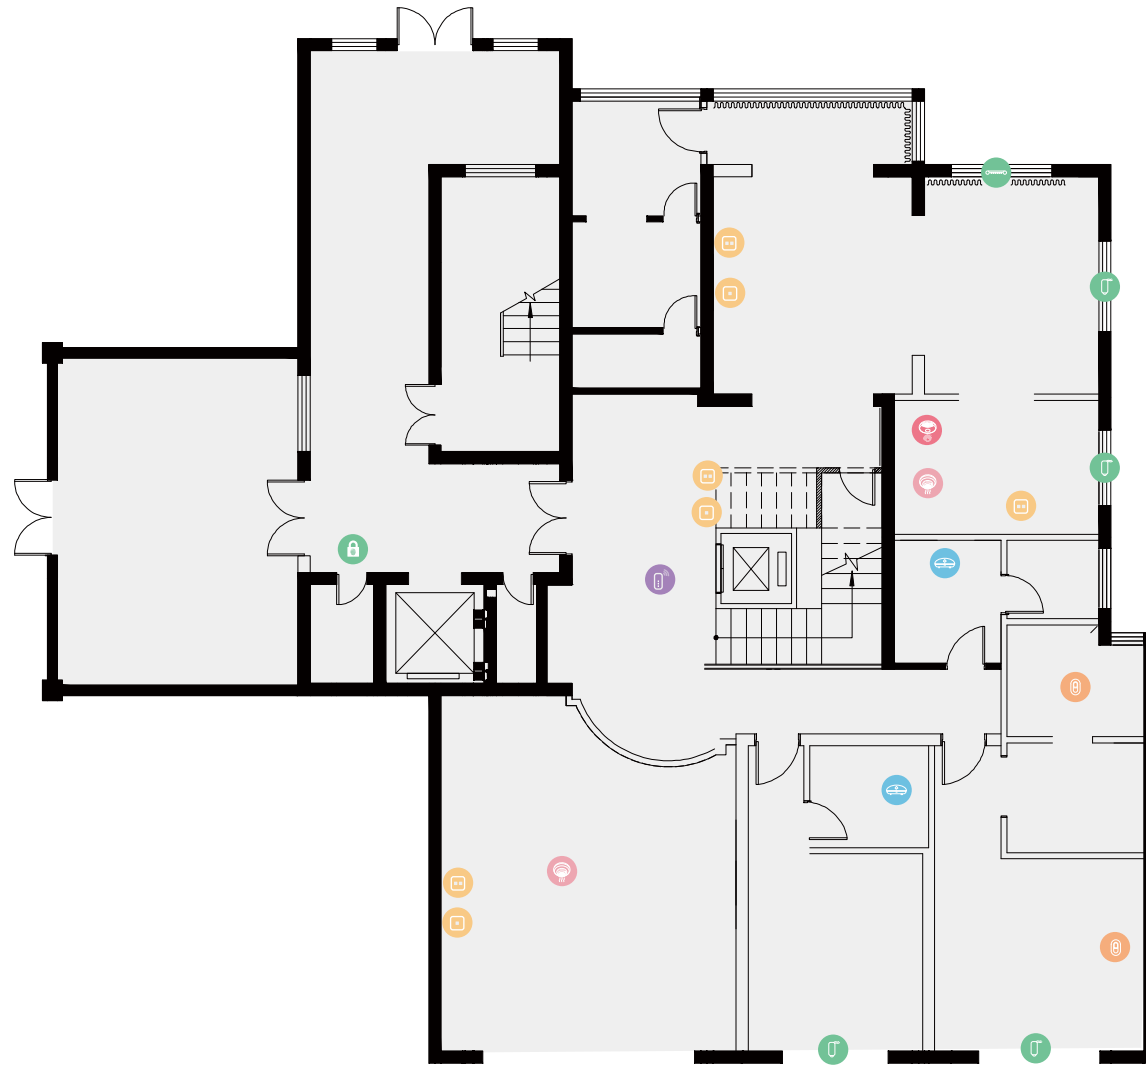

Product List

Device	Entryway	Sitting room	Dining room	Balcony	Kitchen	Bathroom	Main Bedroom	Minor Bedroom1	Minor Bedroom2	Total
Smart Doorlock	1									1
Smart Gateway		1								1
One-gang Switch	1			1						2
Two-gang Switch					1					1
Three-gang Switch		1	1			1	2	2	1	8
Curtain Motor		1					1			2
Wall Socket					3					3
Scene Switch	1	1								2
Gas Detector					1					1
Smoke Detector					1					1
Water Leakage Detector					1					1
Panic Button						1				1
Environmental Monitoring		1								1
Total										25

Villa Configuration Case

